### SANDWICH UNIT REFRIGERATOR

Model: SW32-8

### 32" Standard Top Sandwich Unit Refrigerator with Solid Door - 8 Pans

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



#### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel exterior and interior - SS models	Expansion valve system
Stainless steel end panels - SA models	Rear-mounted cutting board
Glass door in lieu of solid door - GD models	Flat insulated night cover
Stainless steel finished back in lieu of aluminum	Remote models
Drawers in lieu of door	Door lock
Overshelves (single or double)	Adjustable legs
Stainless steel shelves	Digital thermometer
Additional epoxy-coated steel shelves	Crumb catcher
Automatic, electric condensate evaporator	

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com **Project Name:** 

**Model Specified:** 

Location:

Item No: Quantity:

AIA #: SIS #:

#### Standard Model Features

#### REFRIGERATION SYSTEM

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique air flow distribution allows pan product to maintain 33° - 41°F

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Spring loaded, self closing door

Magnetic snap-in door gasket

Heavy-duty, epoxy-coated steel shelf

12" deep, full length nylon cutting board

Insulated lid

5" casters

Completely enclosed, vented and removable case back

#### **MODEL FEATURES**

(8) 1/6 size non-recessed pans, 4" deep Interior hanging thermometer

Field rehingeable door

APPROVAL:

#### Model Specifications

Mouel	oheon	ισαιισ

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	9.0 (253 cu I)
1/6 Size Pans (4" deep)	8
Width, Overall (in.)	32 (813 mm)
Depth, Overall (in.) (incl. handle & bumpers)	31 7/16 (799 mm)
Depth, Body Only (less door) (in.)	27 1/2 (699 mm)
Depth, Cutting Board (in.)	12 (305 mm)
Height, Overall (in.) (incl. 5" casters)	42 1/4 (1073 mm)
Shelf Area (sq. ft.)	3.9 (.4 sq m)
No. of Shelves	1
No. of Doors	1
Interior Depth (in.)	19 3/8 (492 mm)
Interior Height (in.)	26 1/4 (667 mm)
Interior Width (in.)	28 (711 mm)

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620

Voltage (int'l)	115/60/1 (220/50/1)
Fans	2
Total Amps (int'l)	6.3 (3.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

Weight (lbs.)	195 (88 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	39 (991 mm)
Depth - Crated (in.)	46 (1168 mm)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug (varies by country)

# **REFRIGERANT DATA ELECTRICAL DATA SHIPPING DATA**

## 32" (813 mm) 27 3/8" (695 mm) DOOR OPENING

**Model Plan Views** 

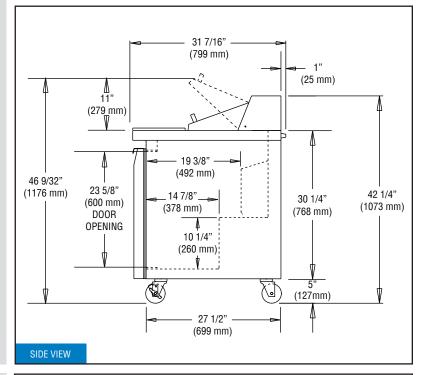

FRONT VIEW

### Refrigerator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









